





Special Series 1370


Certified for:

 Usage cycles
200.000 cycles


Protects from:

-  Air
-  Water
-  Light
-  Insects

 Not an obstacle for disabled persons




STANDARD ACCESSORIES

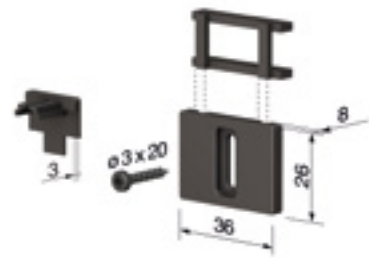


Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100

FASTENING SYSTEMS

STANDARD

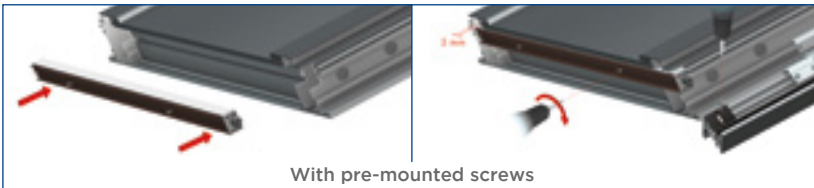

MAIN APPLICATIONS

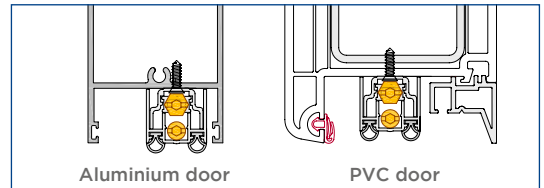

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - dual extruded tubular neoprene gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25mm screws.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

STANDARD PACKAGING

Cardboard box with 30 pcs + 30 standard accessory packs

OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Nylon plate

CA104	CA202	CODE	PROFILE
		CA201	Deceuninck M.
		CA202	Deceuninck Z.
		CA203	VE-KA
		CA204	Kommerling.
		CA205	Schüco CT70
		CA207	Winsol





Colour:
brown, white

Packaging:
100 pcs pack

CA202
on frame with ribbing



Insulating nylon plate with silicon gasket

PI001	PI002	PI002-R	PI003	CODE
				PI003
				Kommerling, Rehau, Winsol
				PI004
				Zendow, Gealan, Schüco
				PI005
				Thyssen

Colour:
brown, white

Packaging:
20 pcs pack

PI003
on frame with ribbing

