


Pressure Series 1772

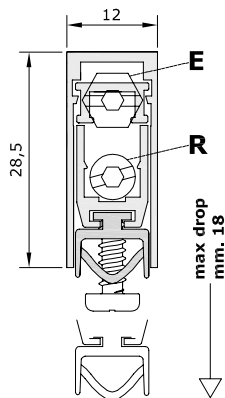

Certified for:

- Sound insulation
44 dB
- Fire resistance:
30 min. (EPDM standard gasket)
60 min. (optional silicon gasket)
- Insulation from smoke
2,16 m² / h / m - 25 Pa
- Usage cycles
200.000 cycles

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

STANDARD ACCESSORIES




Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100

FASTENING SYSTEMS

STANDARD



MAIN APPLICATIONS

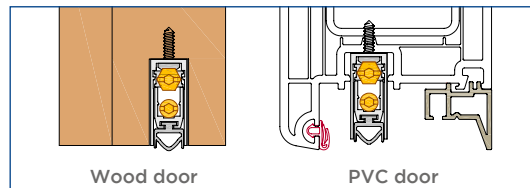

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - tubular extruded gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25mm screws.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

Gasket: silicon tubular.

Screws: particleboard 3.5 x 25 mm.

STANDARD PACKAGING	OPTIONAL PACKAGING
Cardboard box with 40 pcs + 40 standard accessory packs	Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Nylon plate



CODE	PROFILE
CA201	Deceuninck M.
CA202	Deceuninck Z.
CA203	VE-KA
CA204	Kommerling.
CA205	Schüco CT70
CA207	Winsol

Colour:
brown, white

Packaging:
100 pcs pack

CA101
on smooth frame



CA202
on frame with ribbing



Insulating nylon plate with silicon gasket



CODE
PI003
PI004
PI005

Colour:
brown, white

Packaging:
20 pcs pack

PI002
on smooth frame



PI003
on frame with ribbing

