


Pressure Series 1812

Certified for:

-  Sound insulation
44 dB
-  Fire resistance:
30 min. (EPDM standard gasket)
60 min. (optional silicon gasket)
-  Insulation from smoke
2,03 m² / h / m - 25 Pa
-  Usage cycles
200.000 cycles

Protects from:

-  Air
-  Water
-  Light
-  Insects

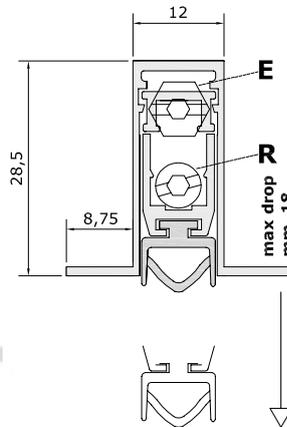

 Not an obstacle for disabled persons


STANDARD ACCESSORIES



Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	


FASTENING SYSTEMS

STANDARD

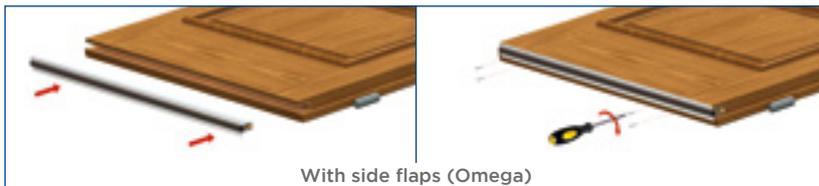

With side flaps (Omega)

MAIN APPLICATIONS

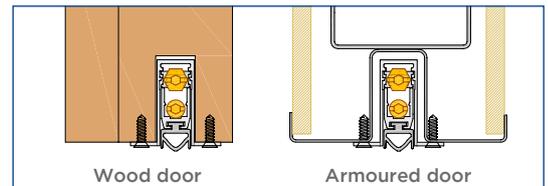

Wood door

Armoured door

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - tubular extruded gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

Gasket: silicon tubular, brush.

STANDARD PACKAGING

Cardboard box with 32 pcs + 32 standard accessory packs

OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Nylon plate

CA101

CA102

CA104

Colour:
brown, white

Packaging:
100 pcs pack



CA101
on smooth frame



CA104
on smooth frame



Insulating nylon plate with silicon gasket

PI001

PI002

PI002-R

Colour:
brown, white

Packaging:
20 pcs pack



PI002
on smooth frame



PI002
on smooth frame

