


Pressure Series 1813

Certified for:

 Usage cycles
200.000 cycles

Protects from:

-  Air
-  Water
-  Light
-  Insects

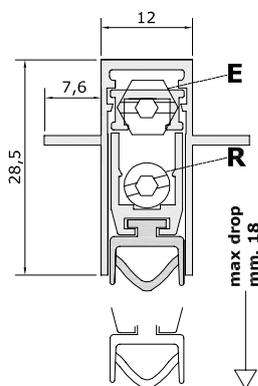

 Not an obstacle for disabled persons


STANDARD ACCESSORIES



Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	


FASTENING SYSTEMS

STANDARD

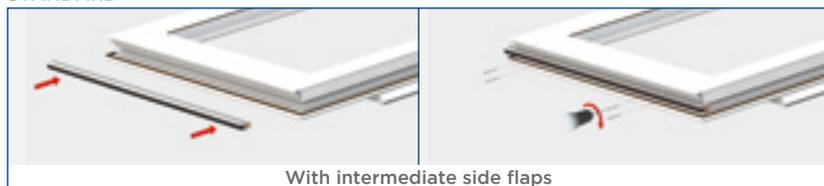

With intermediate side flaps

MAIN APPLICATIONS

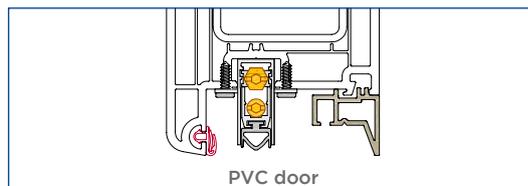

PVC door

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - tubular extruded gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

Gasket: silicon tubular, brush.

STANDARD PACKAGING	OPTIONAL PACKAGING
Cardboard box with 32 pcs + 32 standard accessory packs	Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Nylon plate

CA201	CODE	PROFILE	Colour:
	CA201	Deceuninck M.	brown, white
	CA202	Deceuninck Z.	
	CA203	VE-KA	
	CA204	Kommerling.	
	CA205	Schüco CT70	
	CA207	Winsol	

Packaging:
100 pcs pack

CA203
on frame with ribbing



Insulating nylon plate with silicon gasket

PI003	CODE	Colour:
	PI003	brown, white
	PI004	
	PI005	

Packaging:
20 pcs pack

PI003
on frame with ribbing

