

Special Series AE16


Certified for:

 Usage cycles
200.000 cycles

Protects from:

-  Air
-  Water
-  Light
-  Insects

 Not an obstacle for disabled persons




STANDARD ACCESSORIES



Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100

FASTENING SYSTEMS


STANDARD

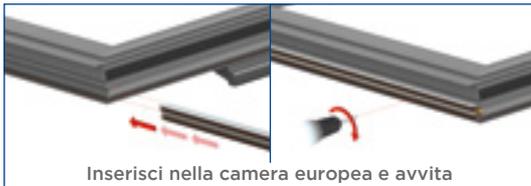

OPTIONAL



MAIN APPLICATIONS

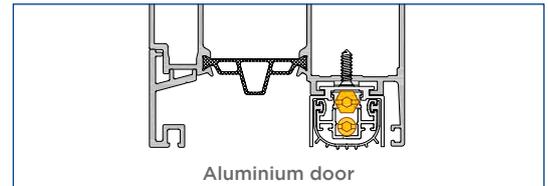

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25mm screws.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

Gasket: dual high performance silicone lamellar gasket (art. AE p.40).


STANDARD PACKAGING	OPTIONAL PACKAGING
Cardboard box with 30 pcs + 30 standard accessory packs	Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Insulating nylon plate with silicon gasket

PI003	CODE	Colour:
	PI003 Kommerling, Rehau, Winsol	brown, white
	PI004 Zendow, Gealan, Schüco	
	PI005 Thyssen	
		Packaging: 20 pcs pack

PI003
on frame with ribbing

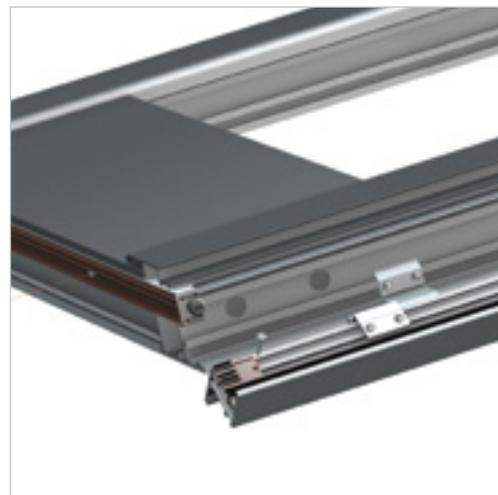

Steel fixing brackets



Colour:
steel

Packaging:
20 pcs pack